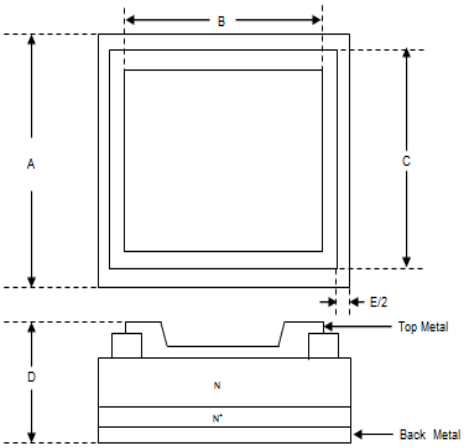
TSB130T045S(A)S-310A

20A/45V(1), low VF Schottky barrier diode with trench MOS structure

Mechanical Data

Chip Drawing	Item	Information	
	Die Size (A)	3302μm	130 mil
	Top Metal Pad Size (B)	3223μm	127mil
	Chip Size (C)	3251μm	128mil
	Wafer Thickness (D)	310 μm	11.4 mil
	Scribe Line Width (E)	80 μm	3.15 mil
	Wafer Size	6 inch	
	Top Side Metallization	Al/Ag	
	Back Side Metallization	Ti Ni Ag	
	Recommended Storage Environment	Stored in original container, in dry nitrogen, (6 months at an ambient temperature of 23 ±3)	

Electrical Characteristics (T_J=25℃, unless otherwise specified)(2)

Parameter	Description	Min.	Typ.	Max.	Unit	Test Condition
V_{BR}	Reverse Breakdown Voltage	48	53	-	V	I_R =100μA
V_F	Instantaneous Forward Voltage	-	0.47	0.50	V	I_F =20A(3)
I_R	Reverse Leakage Current	-	13	40		V_R

0514-80982370
0514-87943666